



QY30K5H_1汽车起重机 / Truck Crane

技术规格书


Technical specifications



30t



43m



50.4m




2023年4月 第2版
2nd edition, April 2023

目录
Contents

目录 Contents	
尺寸参数 Dimensions	4
技术规格 Product specifications	5-8
车型与选装件 Version and optional equipment	9
重量/作业速度 Weight / Working speeds	10
臂架组合方案 Boom / Jib combinations	11
主臂 Boom	12-13
副臂 Jib	14-15
注意事项 Notes	16
符号标识 Description of symbols	17
主要技术参数表 Table of main technical parameters	18-19

尺寸参数
Dimensions

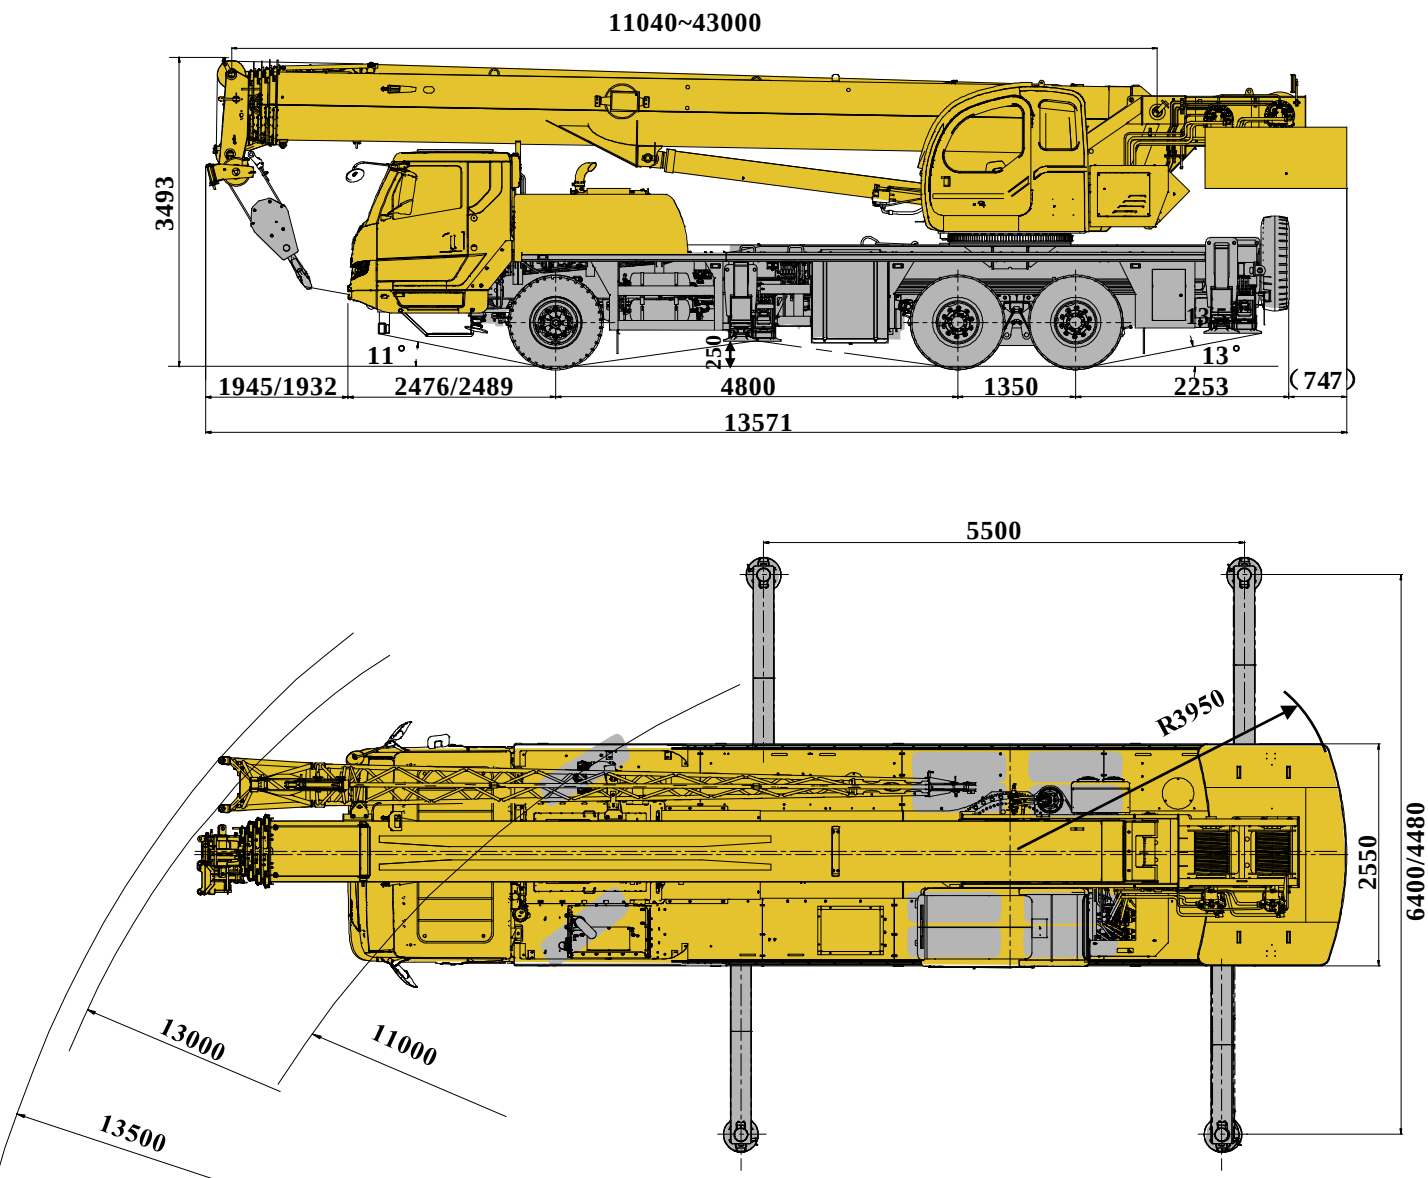

备注：当配置齐星驾驶室时，前伸:1932mm，前悬为2489mm；
当配置徐工汽车驾驶室时，前伸:1945mm，前悬为2476mm。

Remark:
Front extension: 1932 mm, front overhang: 2489 mm (when equipped with Qixing driver's cab);
Front extension: 1945 mm, front overhang: 2476 mm (when equipped with XCMG Automobile driver's cab).

技术规格

Technical specifications



底盘

车架	徐工设计、制造，全覆盖式走台板，防扭转箱型结构，高强度钢材制造。
支腿	4支腿；纵向H形布置，操作杆控制液压动作；可由底盘任一侧同时或单独控制各支腿的动作，设有水平仪；带第五支腿；且垂直支腿带有液压双向锁。 支脚盘尺寸：φ400mm 最大起重量时支腿反力：323KN
发动机	SC9DF290Q5，上柴直列六缸水冷电控柴油发动机，最大净功率 211KW/2200rpm，最大净扭矩 1200Nm/1400rpm，欧V排放标准。燃油箱容积：320L。
变速箱	法士特8档变速箱，机械操纵，带同步器。
车桥	汉德高强度车桥，2,3桥驱动。
悬挂	前悬架：纵置钢板弹簧，筒式减震器； 后悬架：橡胶悬架，重量轻，免维护。
轮胎	10个轮胎，1个备胎，前桥装单胎，中桥、后桥装双胎。 轮胎规格：315/80R22.5（一轴） 12R22.5（二、三轴）。
制动	行车制动：双回路气压制动，作用于所有车轮。 驻车制动：弹簧贮能制动，作用于2-3轴车轮。 辅助制动：发动机排气制动。
转向	机械式转向机构，带有液压助力
驾驶室	全宽驾驶室，乘员2人；配置可调式座椅、方向盘、安全玻璃、3只雨刷器、电动门窗升降器、杂物箱、空调。
电气系统	直流24伏特，串联12伏特的电池组2个；



上车

结构	徐工设计、制造，高强度钢材制造。
液压系统	底盘发动机驱动定量齿轮泵，用于起升、变幅、伸缩。负载敏感式比例多路换向阀，带有抗冲击阀、防气蚀阀；风冷式液压油散热器； 液压油箱容积：420L
操纵方式	液控先导操纵系统，由左右2个操纵手柄控制由液压泵和比例阀进行液压先导式控制起重机的全部动作。
主起升机构	液压控制调速，装有双折线绳槽卷筒，由液压马达通过行星齿轮减速器驱动，内置常闭式制动器并带有平衡阀。
副起升机构	液压控制调速，装有双折线绳槽卷筒，由液压马达通过行星齿轮减速器驱动，内置常闭式制动器并带有平衡阀。
回转机构	四点接触球式回转支承，由液压马达驱动行星齿轮回转机构减速器驱动，可连续回转360°；具有动力控制或自由回转的功能，可无级调速；回转杆设有鸣响开关。
变幅机构	单支双作用前置液压变幅油缸，带有平衡阀。
操纵室	新型钢制操纵室，装有无视野死角的前景窗，安全玻璃，车窗装有遮阳板，外开式车门，座椅靠背可倾斜定位，操纵杆安装在座椅两侧的扶手上；前窗顶窗装有雨刮器；标配冷暖空调。
安全装置	液压平衡阀；液压溢流阀；液压双向锁；力矩限制器；三圈保护器，防止钢丝绳过放；臂头设置高度限位，防止钢丝绳过卷。

技术规格

Technical specifications



臂架系统

主臂	5节，“U”形截面的筒形焊接结构。单缸绳排伸缩机构 主臂长度：11m～43m。
臂端单滑轮	单滑轮，安装在主臂顶端用于单股钢丝绳起重作业，最大起重量不超过3t
固定副臂	1节桁架式焊接结构，具有0°、15°、30°三种固定副臂安装角 固定副臂长度：8.3m

技术规格

Technical specifications

	Chassis
Frame	Designed and manufactured by XCMG, it is made of high strength steel with fully covered walking surface and anti-torsion box-typed structure.
Outriggers	Four outriggers arranged in H-shape are hydraulically controlled by control levers. There is an outrigger control station located at each side of the chassis, and there is a level gauge on each control station. The outrigger movements can be simultaneously or separately controlled at any side of the chassis. A fifth jack is available. Each jack cylinder is equipped with a double-way hydraulic lock. Outrigger float diameter: $\phi 400$ mm Reaction force of outrigger at max. lifting load: 323 KN
Engine	SC9DF290Q5, in-line six-cylinder EFI diesel engine, Shanghai Diesel Engine Co., Ltd., max. power 211kW/2200rpm, max. torque 1200Nm/1400rpm, the Euro V emission standards. Fuel tank capacity: 320L
Transmission	FAST mechanical control, 8 speed transmission with synchronizers.
Axles	High strength axles, made by Hande Axle Co., Ltd. 2nd axle and 3rd axle are for driving.
Suspension	Front suspension: longitudinal leaf spring balanced suspension, with cylindrical shock absorber. Rear suspension: lightweight and maintenance-free rubber suspension.
Tires	10 tires and 1 spare tire. Single tire installed on the front axle, dual-tire installed on the middle and rear axles. Tire specifications: 315/80R22.5(1 st xle), 12R22.5(2nd and 3rd axle).
Braking system	Service brake: dual-circuit air pressure brake, acting on all wheels; Parking brake: spring applied brake, acting on the wheels of axles 2~3. Auxiliary brake: engine exhaust brake.
Steering system	Mechanically steering mechanism with a hydraulic booster.
Driver's cab	Full-dimension cab, 2-man design. It is equipped with adjustable seats, steering wheel, safety glass, 3 wipers, electrically operated door window lifters, glove box and air conditioning.
Electrical system	24 V DC, two sets of 12 V battery in series.

	Superstructure
Frame	Designed and manufactured by XCMG, made of high strength steel.
Hydraulic system	The chassis engine drives the constant displacement gear pump to realize hoisting, luffing and telescoping operations. Load sensing proportional multi-way change valve with impact resistance valve and cavitation-proof valve integrated; air-cooled hydraulic oil radiator. Oil tank capacity: 420L.
Control system	Pilot hydraulic control is used for controlling the superstructure. All crane movements are controlled by the hydraulic pump and proportional valve through two control levers on the left and right sides.
Main winch	Hydraulic control is used for speed regulation. The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake, a balanced valve and a Lebus-type grooved drum equipped.
Auxiliary winch	Hydraulic control is used for speed regulation. The system is driven by a hydraulic motor through a planetary gear reducer, with a normally closed brake, a balanced valve and a Lebus-type grooved drum equipped.
Slewing system	Four-point contact-ball slewing ring is driven by the planetary gear reducer of slewing mechanism, which is driven by a hydraulic motor, and may continuously slew 360°. Power control and free slewing function as well as stepless speed regulation are available. There is a horn switch fitted on the slewing control lever.
Luffing system	A front support dual-acting hydraulic cylinder is equipped for luffing operation, with a counterbalance valve fitted.
Operator's cab	Ergonomic cab design, with swing-out doors, safety glass, sun visor, adjustable seats and protective rails equipped. Air-conditioner is standard.
Safety devices	Hydraulic balance valve, hydraulic relief valve, double-way hydraulic valve, LMI, lowering limiter for preventing wire rope from over-releasing, and anti-two block at boom head for preventing wire rope from over-winding.

技术规格

Technical specifications



Boom and jib system

Boom	5-section boom with U cross-section, welding structure. Single-cylinder plus ropes telescoping system Boom length: 11m~43 m.
Single top	Fitted at boom head, used for single line operation. The maximum lifting load is no more than 3 t.
Fixed jib	One section lattice jib, welded structure. Three offset angles of 0° , 15° and 30° . Fixed jib length: 8.3 m.

车型与选装件

Version and optional equipment

车型 Version	功能描述 Function description	选择 Selection
标准型 Standard	五节主臂43m 5-section boom of 43 m	
注释：该产品仅标准型一种车型。 Note: only standard version is available for this model.		

可选装件 Optional equipment	选择 Selection
监视系统电气 Electrical system of the monitoring system	
风速仪 Anemometer	
回转报警灯 Slewing beacon lamp	
角度指示器 Angle indicator	
倒车影像辅件 Rear view camera attachments	
空调装置 Air conditioner	
排气尾管防火帽 Exhaust pipe spark arrestor	
测长传感器 Length measuring sensor	
旋转报警灯 Rotary beacon lamp	
ABS	
排气尾管防护罩 Exhaust pipe protective cover	

重量
Weight



车桥 Axle	1	2	3	总重量 Total weight
t	7.2	13	13	33.2



吊钩 Hook block	倍率 Parts of line	吊钩重量 Weight (kg)	吊钩尺寸 Dimensions (mm)	备注 Remarks
30t	9	260	353×390×1202	单钩 Single hook
3t	1	60	236×236×518	单钩 Single hook

作业速度
Working speeds



315/80 R22.5 (一轴1st axle) 12R22.5 (二、三轴2nd, 3rd axle)	 2.5 ~ 80	 40%
--	---	--



作业机构 Operation mechanism	作业速度 Working speed	最大单绳拉力 Max. single line pull	钢丝绳直径/长度 Rope diameter/ length
	0-130 m/min , 单绳 , 第四层 m/min, single line, 4th layer	32.6 kN	16mm/185m
	0-130 m/min , 单绳 , 第四层 m/min, single line, 4th layer	32.6 kN	16mm/110 m
	0-2.5 r/min		
	从-2°抬起至79°约38s Approx. 38 s for boom luffing from -2° to 79°		
	从11m伸出至43m约60s Approx. 60 s for boom extending from 11m to 43m		

臂架组合方案
Boom/ Jib combinations




主臂
Telescopic boom

T : 11~43m



副臂
Jib


T : 11~43m
J : 8.3 m

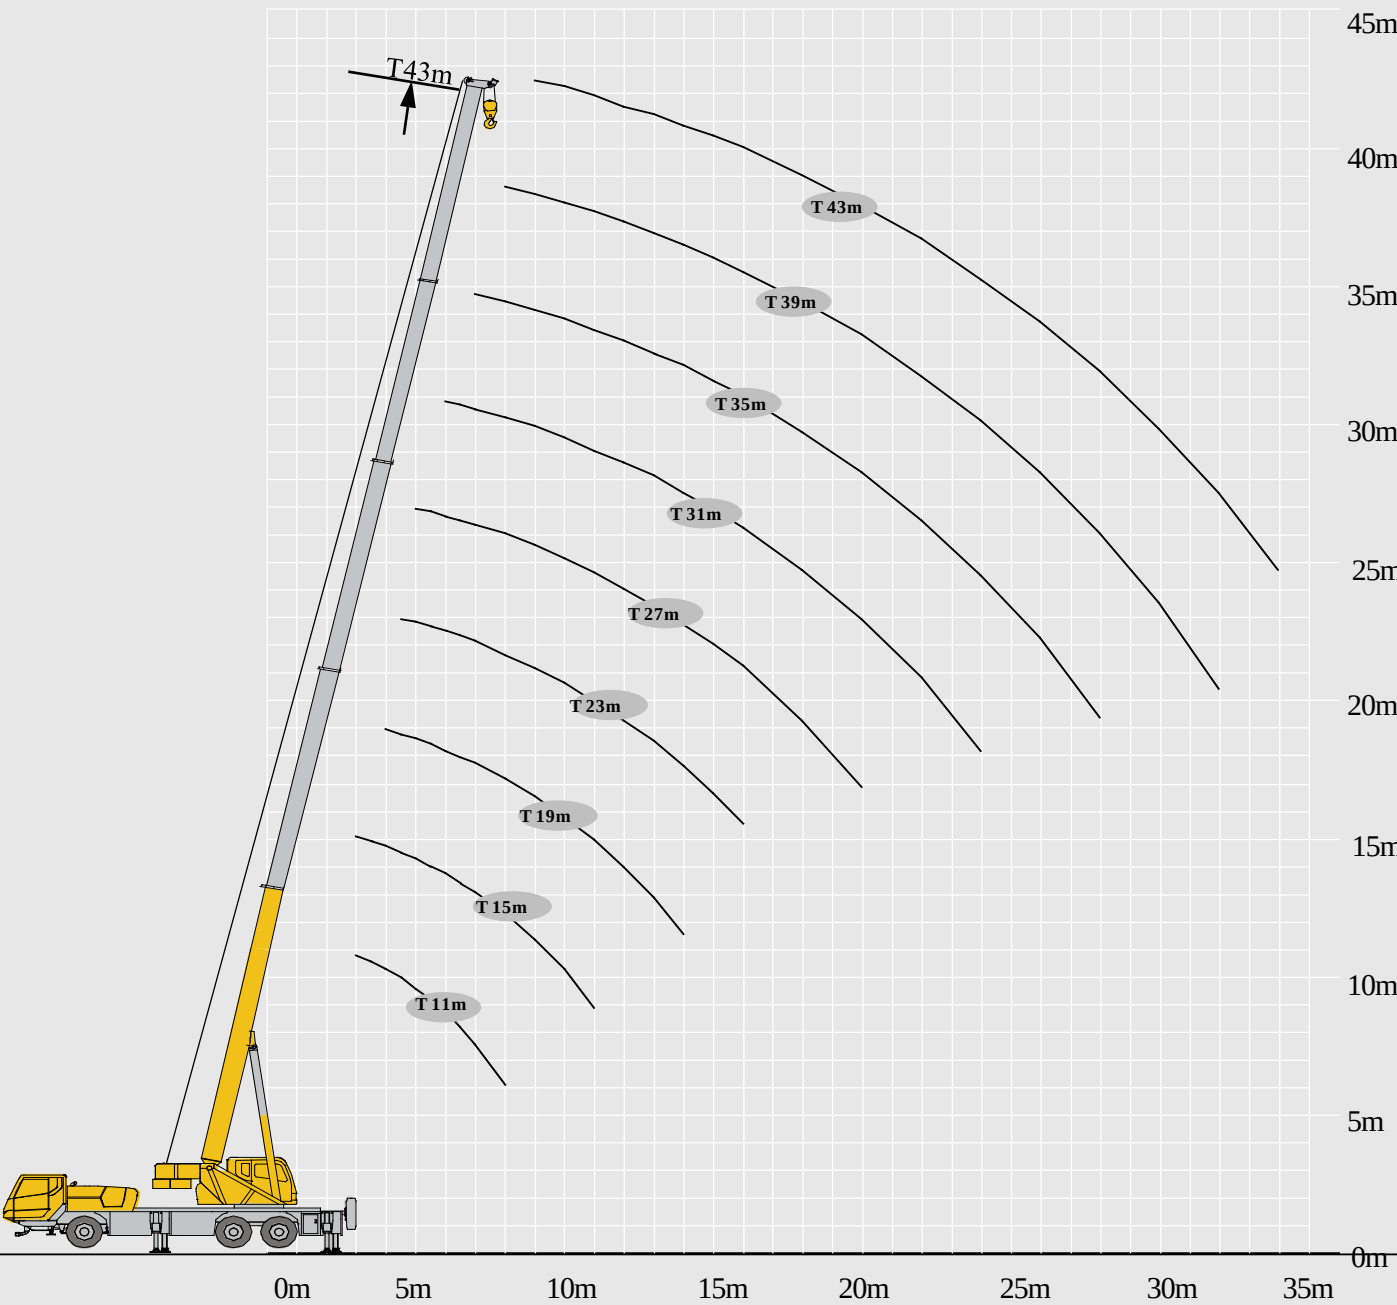

起重性能表
Lifting capacities




T 11.0~43.0m

	11-43m 5.5m×6.4m 360° 6.6t										
	11m	15m	19m	23m	27m	31m	35m	39m	43m		
3	30									3	
3.5	25	21								3.5	
4	24.5	21	20							4	
4.5	23.5	21	19.5	18.3						4.5	
5	22.4	20.5	19	17.8	16.1					5	
5.5	20.5	20	18.5	17.3	16.1					5.5	
6	18.3	17.8	17.5	16.5	15.7	11.9				6	
6.5	16.5	16	16.2	16	15.2	11.7				6.5	
7	15	14.5	15.2	15	14.7	11.2	9.5			7	
8	13	12.3	13	13	12	10.5	9	7.6		8	
9	10.5	10.6	11	10.5	11.5	9.9	8.5	7.2		9	
10		9.4	9.4	9.7	9.8	9.4	8.1	6.9	5.6	10	
11		8.4	7.7	8.3	8.5	8.6	7.7	6.6	5.4	11	
12		6.5	7.3	7.3	7.9	7.6	7.3	6.3	5	12	
13		5.6	6	6.7	6.9	6.7	6.5	6	4.9	13	
14			5.3	6	6.1	6.2	6.3	5.7	4.8	14	
15			4.4	5.3	5.4	5.5	5.5	5.3	4.7	15	
16			3.9	4.7	4.8	4.9	4.9	5	4.5	16	
18				3.2	3.8	3.9	3.9	4	3.9	18	
20				2.5	3.1	3.1	3.2	3.2	3.2	20	
22					2	2.5	2.5	2.6	2.6	22	
24					1.6	2	2.1	2.1	2.1	24	
26						1.4	1.7	1.7	1.8	26	
28						1.1	1.2	1.4	1.4	28	
30							0.9	1.1	1.2	30	
32							0.7	0.7	0.9	32	
34								0.6	0.7	34	
36								0.5	0.5	36	

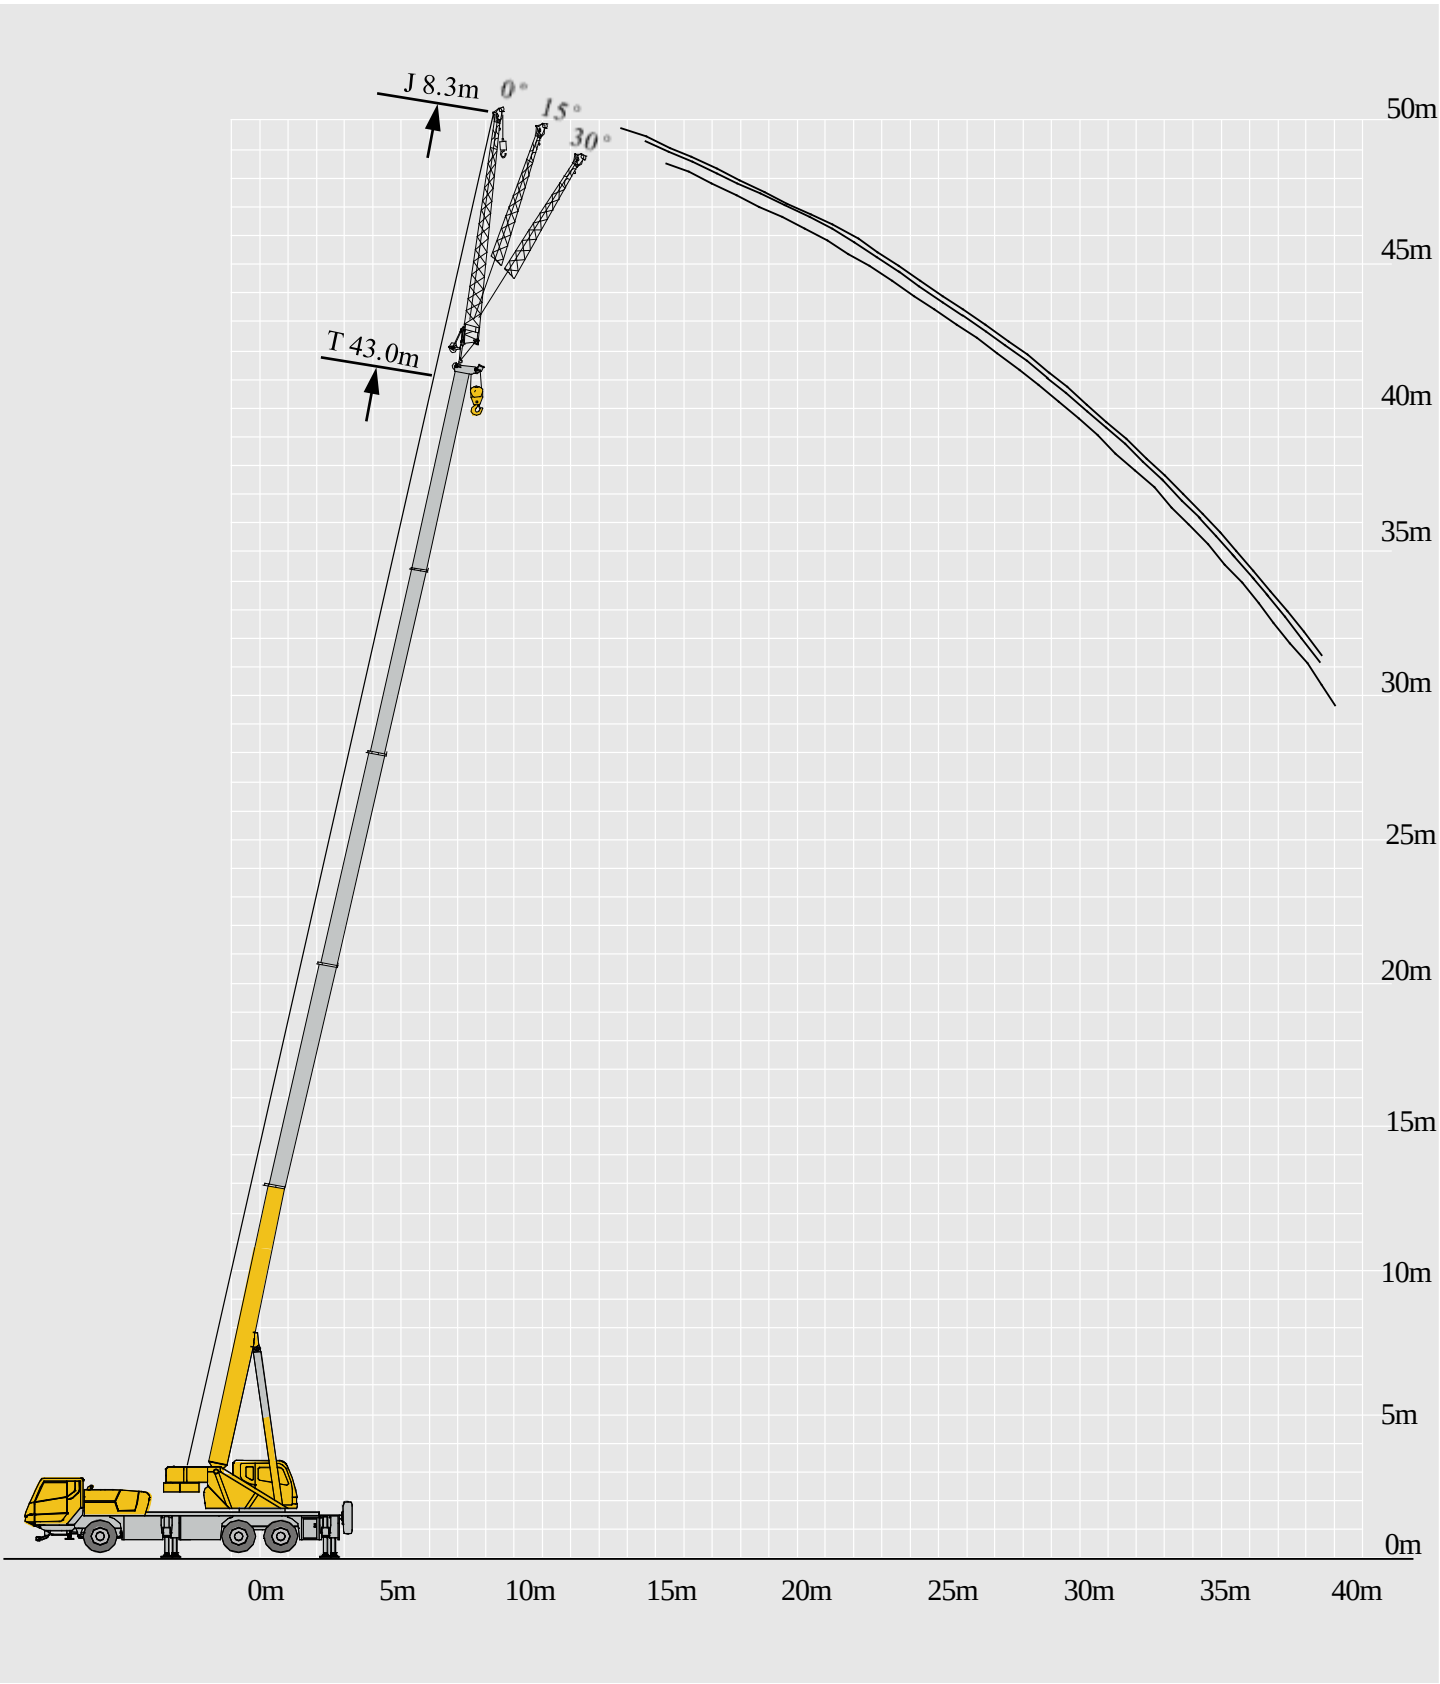

起重性能表
Lifting capacities

T 43.0m+8.3m

     																
0°					15°					30°						
78	3					2.8					1.6					78
75	3					2.5					1.5					75
72	2.9					2.3					1.35					72
70	2.7					2					1.3					70
65	2.2					1.6					1.2					65
60	1.4					1.3					1.1					60
55	0.9					0.8					0.8					55
50	0.5					0.5					0.5					50

1. 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
2. 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
3. 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
4. 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
5. 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
6. 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

1. The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted to correctly calculate the load weight.
2. The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection.
3. A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
4. Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
5. Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
6. The boom length given in the rated load charts should accord with the telescoping code of boom sections.

符号标识

Description of symbols

常规标识

General symbols

	上车 Superstructure		底盘 Chassis
	起重能力 Lifting capacity		车桥 Axle
	吊臂长度 Boom length		行驶速度 Driving speed
	工作幅度 Radius		爬坡能力 Grade ability
	吊臂仰角 Boom angle		轮胎 Tires
	主臂起升高度 Hoist height with boom		支腿 Outriggers
	固定副臂长度 Fixed jib length		吊钩 Hook block
	副臂安装角 Jib offset angle		卷扬 Winch
	副臂起升高度 Hoist height with jib		平衡重 Counterweight
	使用第五支腿360°全回转 360° operation of the boom with 5th jack down		不使用第五支腿侧后方作业 Over side or over rear of the crane

主要技术参数表
Table of main technical parameters

类别 Category	项目 Item		单位 Unit	参数 Parameter
尺寸参数 Dimensions	外形尺寸（长×宽×高） Dimensions (length×width×height)		mm	13571×2550×3493
	轴距 Wheel base		mm	4800+1350
	轮距（前/后） Track (Front/ Rear)		mm	前轴Front axle：2060（汉德Hande） 后轴Rear two axles：1840（汉德Hande）
	前悬/后悬 Front/ Rear overhang		mm	2476（徐工汽车XCMG Automobile）2489 （齐星Qixing）/2253
	前伸/后伸 Front/ Rear extension		mm	1945（徐工汽车XCMG Automobile）1932 （齐星Qixing）/747
重量参数 Weight	最大允许总质量 Max. permissible total weight		kg	33200
	轴荷 Axle load	一轴 1st axle	kg	7200
		二轴 2nd axle	kg	13000
		三轴 3rd axle	kg	13000
动力参数 Power	发动机型号 Engine model		——	SC9DF290Q5
	额定功率/转速 Rated power/rpm		kW/(r/min)	——
	最大净功率/转速 Max. net power/rpm		kW/(r/min)	211/2200
	最大输出扭矩/转速 Max. output torque/rpm		N.m/(r/min)	1200/1400
行驶参数 Travel	最高车速 Max. travelspeed		km/h	≥80
	最低稳定车速 Min. stable travel speed		km/h	2.5～3
	最小转弯直径 Min. turning diameter		m	≤22
	臂头最小转弯直径 Min. turning diameter at boom tip		m	≤27
	最小离地间隙 Min. ground clearance		mm	250
	接近角 Approach angle		°	11
	离去角 Departure angle		°	13
	制动距离（制动初速度为30km/h） Braking distance (at 30 km/h)		m	≤10
	最大爬坡能力 Max. grade ability		%	≥40
	百公里油耗 Fuel consumption per 100 km		L	30
噪音 Noise	加速行驶机外噪声 Exterior noise level when accelerating		dB(A)	≤84
	驾驶员耳旁噪声 Noise level at seated position		dB(A)	≤90

主要技术参数表
Technical parameters

类别 Category	项目 Item		单位 Unit	参数 Parameter	
主要性能参数 Main performance	最大额定总起重量 Max. total rated lifting capacity		t	30	
	最小额定工作幅度 Min. rated working radius		m	3	
	转台尾部回转半径 Turning radius at turntable tail	平衡重处 Counterweight	mm	3950	
		副卷处 Auxiliary winch	mm	—	
	最大起重力矩 Max. load moment	基本臂 Base boom	kN.m	1105	
		最长主臂 Fully-extended boom	kN.m	706	
		最长主臂+副臂 Fully-extended boom + Jib	kN.m	497	
	支腿跨距 Outrigger span	纵向 Longitudinal	m	5.5	
		横向 Lateral	m	6.4	
	起升高度 Hoist height	基本臂 Base boom	m	10.8	
		最长主臂 Fully-extended boom	m	42.3	
		最长主臂+副臂 Fully-extended boom + Jib	m	50.4	
	起重臂长度 Boom length	基本臂 Base boom	m	11.0	
		最长主臂 Fully-extended boom	m	43.0	
		最长主臂+副臂 Fully-extended boom + Jib	m	51.3	
副臂安装角 Jib offset angle		°	0、15、30		
工作速度参数 Working speed	起重臂起臂时间 Boom raising time		s	≤38	
	起重臂全伸时间 Boom fully extended time		s	≤60	
	最大回转速度 Max. slewing speed		r/min	≥2.5	
	支腿收放时间Outrigger extending and retracting time	水平支腿 Outrigger beam	收 Retracting	s	≤20
			放 Extending	s	≤40
		垂直支腿 Outrigger jack	收 Retracting	s	≤20
			放 Extending	s	≤40
	起升速度（单绳,第四层，空载） Hoisting speed (single line, 4th layer, no load)	主起升机构 Main winch	m/min	≥130	
副起升机构 Auxiliary winch		m/min	≥130		
噪声 Noise	机外辐射 Exterior noise level		dB (A)	≤108	
	司机位置处 Noise level at seated position		dB (A)	≤85	



地址：江苏省徐州市经济技术开发区高新路68号

Add : No. 68 Gaoxin Road,
Economic and Technological Development Zone,
Xuzhou, Jiangsu, China

电话(Tel) : +86-516-83462242/83462350

质量监督电话(Quality Inquiry Tel) : +86-516-
87888268

备件电话(Spare Parts Tel) : +86-516-83461542

邮编(Post Code) : 221004

网址(Web) : www.xcmg.com/qizhongji

服务热线 Service Tel

400-110-9999

400-001-5678



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.